



Product: [0985 YM57530-G 100](#) 

Industrial Ethernet double-ended cord set, 4-pole, male straight connector with bonded twisted pairs, suitable for Fast Ethernet applications, oil-resistant TPE jacket in teal with a robust design for high-flex environments.

Product Description


Industrial Ethernet double-ended cord set, 4-pole, male straight connector with bonded twisted pairs, suitable for Fast Ethernet applications, oil-resistant TPE jacket in teal with a robust design for high-flex environments.


Technical Drawing

M12

Color

- 1 White Orange
- 2 White Green
- 3 Orange
- 4 Green

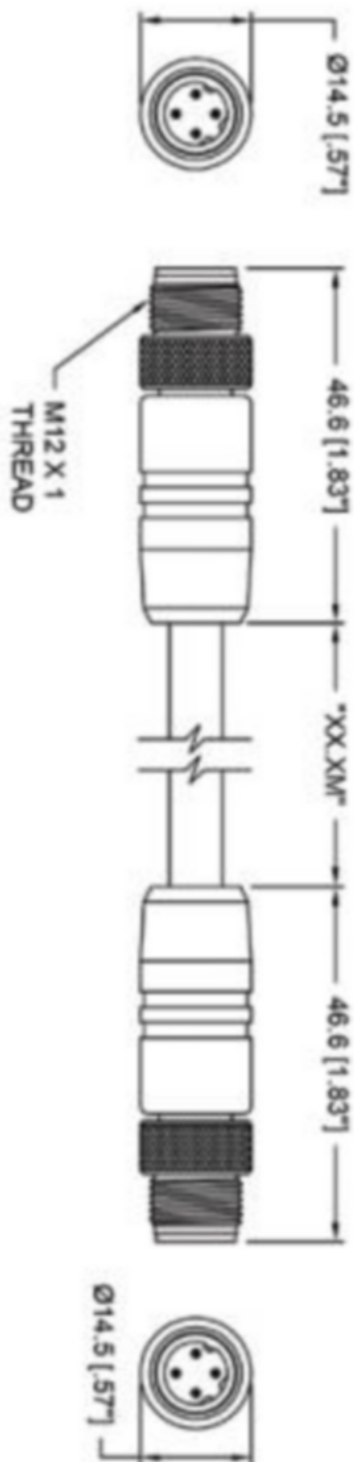

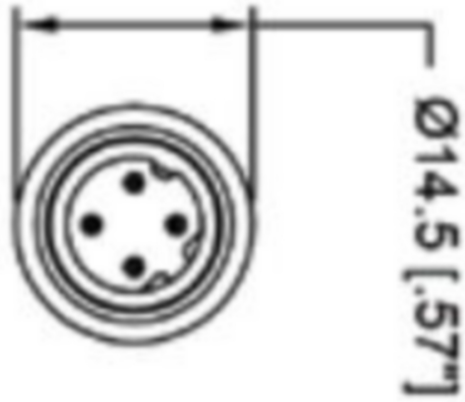

Technical Specifications

Product Description

Brand:	Lumberg Automation
Current Rating:	4 A

Technical Data Side 1

Side 1 Product Sub Family:	m12 standard
Connector Design:	straight
Number of Pins:	4
Coding, Side 1:	D
Ambient Temperature (Operation)*:	- 25 °c - + 75 °c
Protection Degree / IP Rating**:	IP65, IP67
Side 1 Design Standard:	IEC 61076-2-101
Overvoltage Category:	iii acc. to din en 60664-1 (vde 0110-1)
Contact Bearer Color:	Black
Flammability Class (Contact Bearer):	ul 94 hb
Molded Body Color:	Black
Flammability Class (Molded Body):	ul 94 hb
Attachment Material:	CuZn
Attachment Plating:	nickel-plated
Fastening Torque (Attachment):	m 12x1: (50-60) ncm, hand-tight

Cable Data

Conductor Size:	24 AWG
Minimal Bending Radius (Flexible Inst):	10 x d
Cycles (Bending):	3
Cable Jacket Material:	TPE
Cable Diameter D:	ø 7.62 mm
Insulated Wire Diameter:	ø 1.02 ± 0.05 mm
Overall Shield (Cable):	tc braid 65%
Ambient Temperature (Flex Installation):	- 25 °c - + 75 °c
Ambient Temperature (Drag Chain Inst):	- 25 °c - + 60 °c

History

Update and Revision:	Revision Number: 0.10 Revision Date: 04-30-2026
----------------------	---

Variants

Item #	Item Description
900016450	0985 YM57530-G 100/0.5M
900016451	0985 YM57530-G 100/1M
900016452	0985 YM57530-G 100/2M

900016453	0985 YM57530-G 100/3M
900016454	0985 YM57530-G 100/4M
900016455	0985 YM57530-G 100/5M
900016456	0985 YM57530-G 100/6M
900016457	0985 YM57530-G 100/8M
900016458	0985 YM57530-G 100/10M
900016459	0985 YM57530-G 100/12M
900016460	0985 YM57530-G 100/15M
900016461	0985 YM57530-G 100/20M
900016504	0985 YM57530-G 100/30M
900016534	0985 YM57530-G 100/1.5M

© 2026 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.