



Product: [RK 120M-676](#)

Life Cycle Status: Discontinued



Replaced by: [RK 120M-776](#)

Obsolete | Replacement: RK 120M-776

Product Description

MINI C | Single-Ended Cordset | 1-1/8" Female Straight, 12-socket → Open End | Cable Yellow PUR; 18 AWG | 300 V / 5 A

Technical Drawing

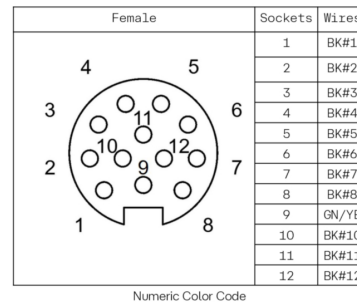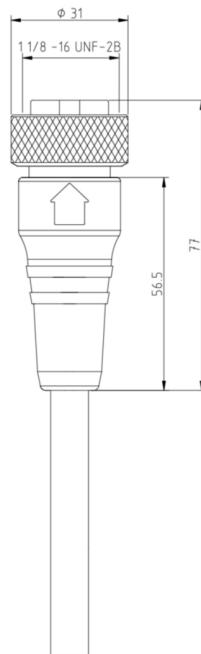

Technical Specifications

Technical Data

Product Family:	Power Connector
Side 1 Product Sub Family:	MINI 1-1/8"
Brand:	Lumberg Automation
Connector Type:	Cordset, single ended
Side 1 Type of Contact/Gender:	Socket Contact / Female
Connector Design:	Molded 1-1/8" Female Straight
Number of Pins:	12 (11+PE)
Coding, Side 1:	A

Shielding Type:	Unshielded
Attachment Type:	Female Thread, Coupling Nut
Voltage Rating:	300 V
Rated Voltage (UL):	300 V
Operating Voltage:	300 V AC/DC
Current Rating:	5 A
Rated Current (UL)*:	Power 5 A Signal 5 A
Mating Cycles:	≤ 100
Ambient Temperature (Operation)*:	- 40 °C to + 90°C
Protection Degree / IP Rating**:	IP65, IP67

Materials

Contact Base Material:	Copper Alloy (CuZn)
Side 1 Contact Plating:	Copper-Silver-Gold-Alloy (Cu/Ag/Au)
Contact Bearer Material:	Thermoplastic polyurethane (TPU)
Contact Bearer Color:	Yellow
Flammability Class (Contact Bearer):	UL 94 HB
Molded Body Material:	Thermoplastic polyurethane (TPU)
Molded Body Color:	Yellow
Flammability Class (Molded Body):	UL 94 HB
Attachment Material:	Aluminum (Al)
Attachment Plating:	Anodized Black

Additional Technical Data

Fastening Torque (Attachment):	MINI: 70 Ncm, hand-tight
--------------------------------	--------------------------

Cable Data

Cable Number:	676
Conductor Size:	18 AWG
Minimal Bending Radius (Fixed Inst):	> 5 x D
Minimal Bending Radius (Flexible Inst):	> 10 x D
Cycles (Bending):	> 5 mio
Conductor Material:	Cu
Cable Jacket Material:	Polyurethane (PUR)
Cable Jacket Color:	Yellow
Cable Diameter D:	Ø 9.91 mm 0.390"
Wire Insulation Material:	Polyvinyl Chloride (PVC)
Insulated Wire Diameter:	Ø 1.73 mm 0.068"
Overall Shield (Cable):	Unshielded
Ambient Temperature (Fixed Installation):	- 40° C to + 80° C
Ambient Temperature (Flex Installation):	- 5° C to + 80° C
Ambient Temperature (Fixed Installation short-term 100h):	- 40° C to + 80° C
Ambient Temperature (Drag Chain Inst):	- 5° C to + 80° C
UL Cable Type:	AWM Style 20233
Flammability Class (Cable Jacket):	FT1, VW-1
Cable Characteristics:	See downloads tab for details

Approvals

UL-File:	E315587
UL:	UL 2238; cURus

Safety & Environmental Compliance

RoHS Compliant:	Yes
-----------------	-----

Resistances

Halogenfree:	Yes
Oil Resistance:	Yes

Notes

Note Derating:	* Notice derating
Protection Degree / IP Rating Note:	IP Rating tested according to IEC standard using combination of a Hirschmann or Lumberg Automation connector mounted and locked
Note:	1. Do not connect or disconnect under load.

Variants

Item #	Item Description	Cable Length
500003002	DISCONTINUED	2 m
500000777	DISCONTINUED	3 m
500000721	DISCONTINUED	5 m
500000741	DISCONTINUED	7 m
500000704	DISCONTINUED R/B 500003254	10 m
500000703	DISCONTINUED R/B 540000703	15 m
500001286	DISCONTINUED	15 ft
500000705	DISCONTINUED	20 m
500000729	DISCONTINUED	20 ft
500000819	DISCONTINUED	25 m
500001287	DISCONTINUED	25 ft
500000730	DISCONTINUED R/B 500003254	30 ft
500000776	DISCONTINUED	30 m
500003087	DISCONTINUED	40 m

© 2026 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.