




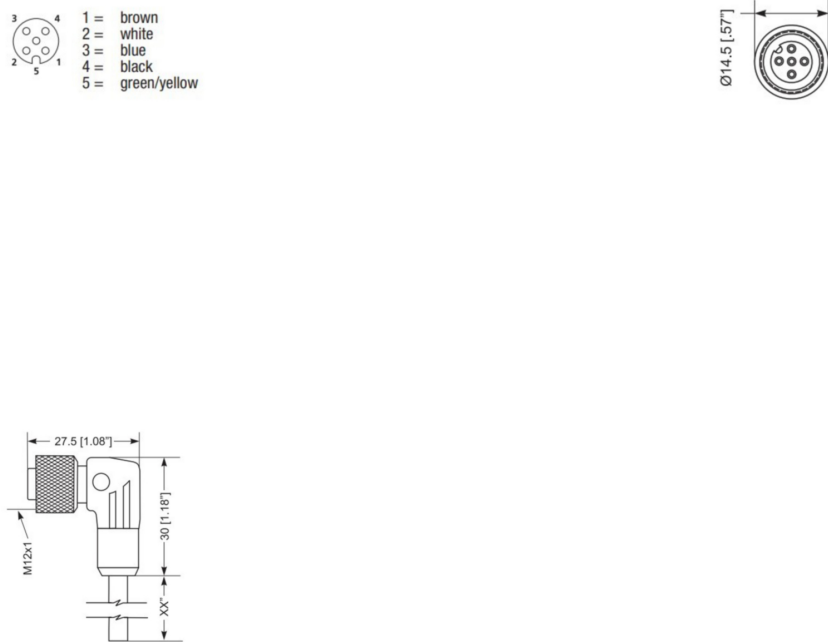
**Product:** [RKWT 5-794](#) 

M12 - Female 90° to Open | #Contacts: 5 | 30 V | Cable TPE YE, 18 AWG, IEC | cURus

**Product Description**

RKT 5-794 - M12 - Female 90° to Open | #Contacts: 5 | 30 V | Cable TPE YE, 18 AWG, IEC | cURus

**Technical Drawing**



**Technical Specifications**

**Technical Data**

Brand:	Belden
Connector Design:	Angled (90°) Body
Number of Pins:	5
Coding, Side 1:	A
Rated Impulse Voltage:	2.5 kV

Contact Resistance:	≤ 10 mOhm
Insulation Resistance:	> 10^9 Ohm
Mating Cycles:	≤ 100
Ambient Temperature (Operation)*:	-40° C - +90° C
Protection Degree / IP Rating**:	IP67
Design Standard:	IEC 61076-2-101
Pollution Degree:	3 acc. to DIN EN 60664-1 (VDE 0110-1)
Overvoltage Category:	II acc. to DIN EN 60664-1 (VDE 0110-1)

### Materials

Contact Base Material:	Copper-Tin (CuSn)
Side 1 Contact Plating:	Copper over Gold (Cu/Au)
Contact Bearer Material:	Thermoplastic Polyurethane (TPU)
Contact Bearer Color:	Yellow
Flammability Class (Contact Bearer):	UL 94 HB
Molded Body Material:	Thermoplastic Polyurethane (TPU)
Molded Body Color:	Yellow
Flammability Class (Molded Body):	UL 94 HB
Attachment Material:	Brass (Cu/Zn)
Attachment Plating:	Nickel-plated (Ni)
O-Ring Material:	FKM, green

### Additional Technical Data

Fastening Torque (Attachment):	M 12x1: (50-60) Ncm, hand-tight
--------------------------------	---------------------------------

### Cable Data

Cable Number:	794
Conductor Size:	18 AWG
Minimal Bending Radius (Flexible Inst):	> 10 x D
Cycles (Bending):	> 5 M
Conductor Material:	Cu
Cable Jacket Material:	Thermoplastic Elastomer (TPE)
Cable Jacket Color:	Yellow
Cable Diameter D:	Ø 7.70 mm [0.304"]
Insulated Wire Diameter:	Ø 2.03 mm [0.080"]
Ambient Temperature (Fixed Installation):	- 35° C - + 105° C
Ambient Temperature (Flex Installation):	+ 5° C - + 105° C
Flammability Class (Cable Jacket):	CSA FT-4
Cable Characteristics:	Oil Resistant, C-Track rated

### Approvals

UL-File:	E104696
UL:	UL 2238; cURus

### Safety & Environmental Compliance

RoHS Compliant:	Yes
-----------------	-----

### History

Update and Revision:	Revision Number: 0.31 Revision Date: 12-07-2025
----------------------	---

### Variants

Item #	Item Description
600006009	RKWT 5-794/10M
600006604	RKWT 5-794/5M
600006608	RKWT 5-794/15M

© 2025 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.