




Product: [RSCS 4T/11](#)

M12 Power Field Attachable Connector: Male, straight, 4-pin, T-coded, shielded, silver housing, screw type, 50 V AC / 60 V DC

Product Description

M12 Power Field Attachable Connector: Male, straight, 4-pin, T-coded, shielded, silver housing, screw type, 50 V AC / 60 V DC

Technical Drawing

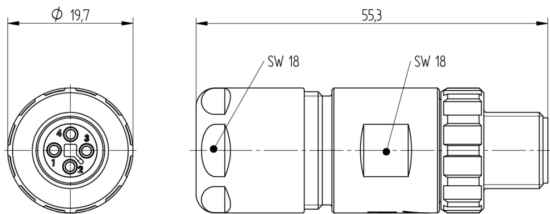

Technical Specifications

Technical Data

| | |
|----------------------------------|-----------------------|
| Product Family: | Power Connector |
| Product Sub Family: | M12 Power |
| Brand: | Lumberg Automation |
| Connector Type: | Field attachable |
| Type of Contact / Gender: | male |
| Connector Design: | straight |
| Number of Pins: | 4 |
| Coding: | T |
| Shielding: | Shielded |
| Attachment Type: | Coupling Screw |
| Rated Voltage: | 63 V |
| Rated Impulse Voltage: | 1.5 kV |
| Operating Voltage: | 50 V AC / 60 V DC |
| Contact Resistance: | ≤ 10 mOhm |
| Insulation Resistance: | > 10 ⁹ Ohm |
| Mating Cycles: | ≤ 100 |
| Type of Connection: | Screw |
| Cable Gland: | PG 11 |
| Maximum Wire Isolation Diameter: | max. Ø2,9 mm |
| Strain-Relief: | clamping cage |

| | |
|-----------------------------------|--|
| Suitable Cables: | 3 gaskets enclosed (Ø3 - Ø6 mm, Ø5 - Ø9 mm, Ø8 - Ø11 mm) |
| Ambient Temperature (Operation)*: | -40 °C to +125 °C, notice derating |
| Protection Degree / IP Rating**: | IP65, IP67 |
| Design Standard: | IEC 61076-2-111 |
| Pollution Degree: | 3 acc. to DIN EN 60664-1 (VDE 0110-1) |
| Clearance / Creepage Distance: | DIN EN 60664-1 (2008/01); VDE 0110-1 |
| Overvoltage Category: | III acc. to DIN EN 60664-1 (VDE 0110-1) |

Materials

| | |
|--------------------------------------|-------------------|
| Contact Base Material: | CuZn |
| Contact Plating: | Cu/Au |
| Contact Bearer Material: | PBT GF |
| Contact Bearer Color: | dark-grey |
| Flammability Class (Contact Bearer): | UL 94 V-2 |
| Housing Material: | CuZn |
| Housing Plating: | Ni |
| Housing Color: | silver |
| Cable Gland Material: | CuZn |
| Cable Gland Plating: | Ni |
| Cable Gland Gasket: | NBR |
| Strain-Relief Material: | PBT GF |
| Flammability Class (Strain Relief): | UL 94 V-2 |
| Attachment Material: | CuZn |
| Attachment Plating: | Cu/Ni |
| Shielding Material: | CuZn, plating: Ni |
| O-Ring Material: | FKM |

Safety & Environmental Compliance

| | |
|-----------------|-----|
| RoHS Compliant: | yes |
|-----------------|-----|

Notes

| | |
|-------------------------------------|--|
| Note Derating: | * Notice derating |
| Protection Degree / IP Rating Note: | ** only if mounted and locked in combination with Hirschmann / Lumberg Automation connector. |

Variants

| Item # | Item Description | Conductor Cross Section | Rated Current |
|-----------|------------------|-------------------------|---------------|
| 934937011 | RSCS 4T/11 | max 1.5 mm ² | 16 A |

© 2024 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with all applicable environmental programs as listed in the data sheet. The information provided is correct to the best of Belden's knowledge, information and belief at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.